



Labond A907

Fibra Glass Mesh 玻璃纖維網布


1.0 Description

High strength, excellent alkali & acid resistance, strong adhesion with resin. Fiber Glass Mesh is designed to tackle non-structural linear or non-structural network cracks. It is used for Sandwich Mesh system of most coatings as reinforcement against mechanical abrasion and surface movement. It is especially suitable for waterproofing, non-structural repair and floor crack system.

2.0 Characteristics

Specification

Specific weight	160 g/m ²
Thickness	0.5 mm
Usual packaging	25 meter rolls in width of 1 m 50 meter rolls in width of 1 m

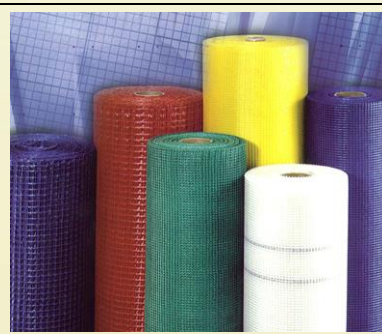

3.0 Application

A907 is an easy application product, it is applied by manual cutting to fit the trim size of intended dimension. For intersection of each bay of application, minimum of overlapping 50mm is required.

To the skirting area, refer to the hereunder typical drawing diagram.

4.0 Diagram

